

Sentry Portal User Guide

Last Updated: July 2021



CONTENTS

Introduction	4
Logging into Sentry	5
The Dashboard	6
Navigation	8
Page Tour	9
Live Lone Workers	10
Manage Portal Users	15
Manage Lone Workers	17
Global Escalations	20
OTA Settings	22
Broadcast Messaging	24
Storage	26
Reports - User Activity Summary Report	27
Reports - Event Details Summary	27
Reports - Alarm Activation Report	27
Reports - Home Safe Reports	27
Reports - User Escalation Details Summary	28
Reports - Amber Alert Utilisation	28
Reports - System Scheduled Reports	28
Reports - Auto Reporting	28
Reports - App User Report	28
Courses	29
Trainee Login	31
Resources	32
Services	33
Contact Information	34

Manage users and escalation processes easily



➤ Introduction to Sentry

Your Lone Worker Management Portal

Sentry is your one stop shop for managing all aspects of your Orbis Lone Worker solution. From managing compliance to maintaining and updating lone worker user information; this easy to use portal gives you the ability to self manage in real-time

The screenshot displays the Orbis Sentry dashboard, a web-based interface for managing lone workers. The top navigation bar includes the Orbis logo, a search icon, a refresh icon, and user information (ORBIS ORBIS DEMO, profile icon, settings icon, and a 'PAGE TOUR' link). The left sidebar contains a 'Dashboard' link and an 'Administration' section with links for 'Live Lone Workers', 'Manage Portal Users', 'Manage Lone Workers', 'Global Escalations', 'OTA Settings', 'Broadcast Messaging', 'Storage', and 'Reports'. Below this is an 'E-Learning' section with 'Trainee login' and 'Courses', followed by a 'Resources' section with 'User Guides' and 'User Videos', and finally an 'Availability' section with 'Services'. The main content area features a top status bar showing 'Users Home: 0/17' and '3 Live Alarm(s)' with a note about the emergency response team. Below this are filters for 'Cost Centre' (ORBIS DEMO), 'Contract Area' (Please select Contract Area), 'Offices' (Please select Office), and 'Date Range' (12-06-2021 - 12-07-2021). A green banner indicates 'SHOWING STATISTICS FOR ORBIS DEMO COST CENTRE'. The dashboard is divided into several sections: a row of six summary cards for 'EVENTS' (8870), 'CONFIRMED EVENTS' (0), 'INACTIVE DEVICES' (1), 'ACTIVE DEVICES' (42), 'ALARM HANDLING' (37.5%), and another 'ALARM HANDLING' card (68.75%); a line chart titled 'NO. OF DEVICES IN USE (EXCLUDING POSITIONS)' showing device utilisation over time; and a map of the United Kingdom and Ireland with various locations marked. A 'zendesk chat' widget is visible in the bottom right corner, along with a 'Send us a message' button and the Orbis logo.

Dashboard

Administration

- Live Lone Workers
- Manage Portal Users
- Manage Lone Workers
- Global Escalations
- OTA Settings
- Broadcast Messaging
- Storage
- Reports

E-Learning

- Trainee login
- Courses

Resources

- User Guides
- User Videos

Availability

- Services

My Account

Users Home: 0/17

3 Live Alarm(s) | Emergency response team at Orbis is currently managing these alarms. Click here for more details.

Cost Centre: ORBIS DEMO

Contract Area: Please select Contract Area

Offices: Please select Office

Date Range: 12-06-2021 - 12-07-2021 **Apply**

*** SHOWING STATISTICS FOR ORBIS DEMO COST CENTRE**

EVENTS	CONFIRMED EVENTS	INACTIVE DEVICES	ACTIVE DEVICES	ALARM HANDLING	ALARM HANDLING
8870	0	1	42	37.5%	68.75%
View details >	View details >	View details >	View details >	View details >	View details >

NO. OF DEVICES IN USE (EXCLUDING POSITIONS)

Device Utilisation

AVERAGE ALARM RESPONSE TIME (IN SEC)

Alarm Handling

UNITED KINGDOM

IRELAND

zendesk chat

Send us a message

Orbis


Type your message here

➤ Logging into Sentry

In order to login to Sentry you must first have the following: internet connection & user login details.
Website Address: <https://sentry.orbisprotect.com>

From here enter your username and password to Log in. If you require access setting up for Sentry please contact the Orbis support team on lwpsupport@orbisprotect.com. If you have forgotten your password think click the 'Forgot Password' link and follow the onscreen instructions.

The home screen also displays a service level update and link which when clicked will show you if the services are running as they should be.

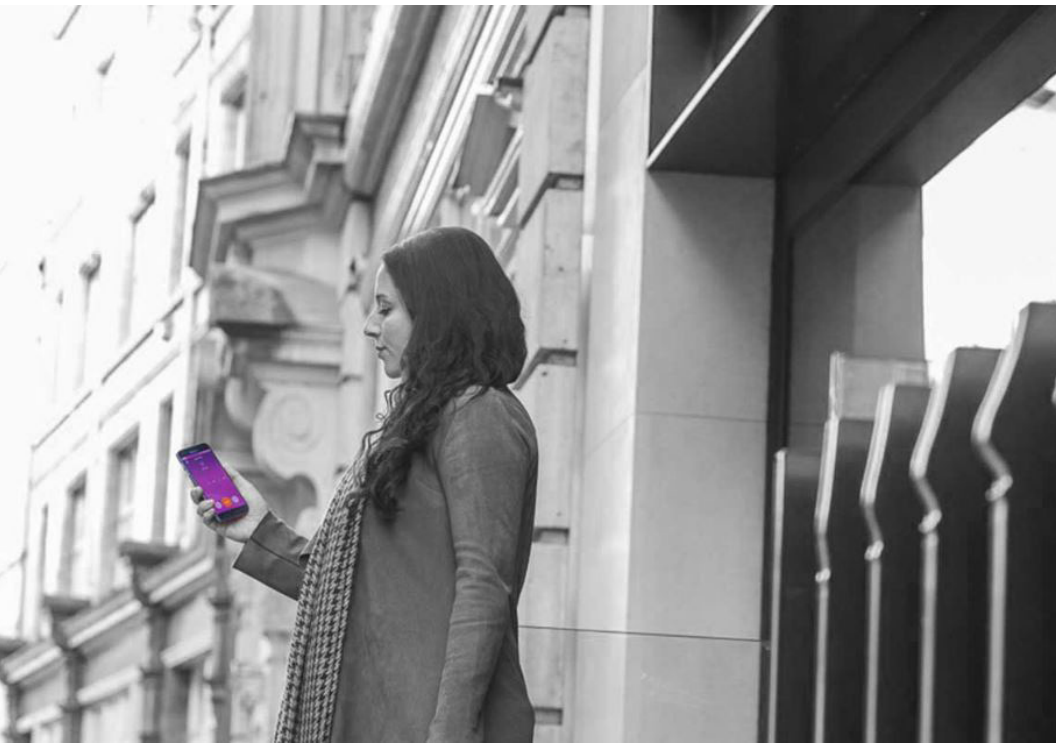


Username *

Password *

[Log in](#)

[Forgot Password?](#)

Service availability
Online

Our services are up and running normally. Visit our page dedicated for service availability
orbis.statushub.io

➤ The Dashboard

When you have successfully logged into Sentry the first page you will be presented with is the Dashboard. From the dashboard you will be able to:

Navigate to other pages of the portal

All pages of Sentry are accessed using the menu on the left hand side.

Overview of your lone worker data

A large area of the dashboard is used to show you a quick overview of your lone worker data. The date range and lone worker hierarchy can be adjusted using the selectable



Dashboard Key	
Events	number of signals received
Confirmed Events	number of Red Alert activations received
Inactive Devices	number of inactive devices
Active Devices	number of active devices
Alarm Handling within 10 & 40 Seconds	% of Red Alert activations answered within 10 & 40 seconds
No of devices in use	Historical graph showing number of connections
Last Known Location	Map showing last known location of users
Average Alarm Response Time	Graph showing average response time for Red Alert activations
Most Active Users	List of your most active Lone Workers
Least Active Users	List of your least active Lone Workers
Users Home	Number of RedAlert Home Safe Users who are safely home

Logout

For security and data protection reasons it is important that when you have finished using Sentry you logout. To do this simply click on the drop down menu in the top right corner of the page and select 'logout'.

Live Chat


Live chat is available on all pages within Sentry and can be accessed via the 'Chat With Us' link found locate in the right hand corner. Live chat is manned Monday to Friday 9am – 5pm and is monitored by the lone worker support team. These feature can be used to chat to us about all lone worker questions you may have.

➤ Navigation

All areas of Sentry are accessed using the menu on the left hand side and depending on your level of access will depend on what menus are available for you to select.

If a menu option is not available then speak with you manager to find out if you are able to be given access to this area. If agreed then your manager will notify Orbis and access will be granted.

The navigation menu is accessible from all pages of Sentry so navigation from one area to another should be straight forward and quick to do.

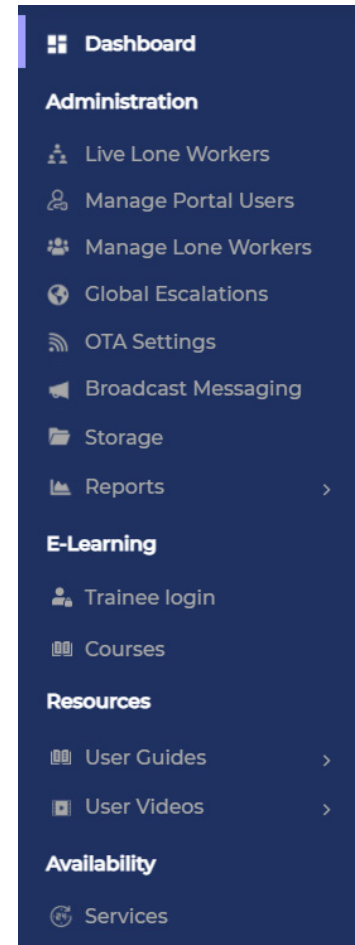

➤ Page Tour

On all pages of the Sentry portal there are interactive tutorials called Page Tours. To begin the Page Tour click on the Red Page Tour button which is found in the top right of each page.

When selected you will be shown relevant a description of what each area of the page is and does. You can navigate the Page Tour by using the Skip, Back and Next buttons.

A screenshot of the Sentry portal interface. At the top, there are three filter sections: "Cost Centre" with a dropdown menu showing "ORBIS DEMO", "Contract Area" with a dropdown menu showing "Please select Contract Area", and "Offices" with a dropdown menu showing "Please select Offices". Below these filters is a "Get Configuration" button and a search bar. A white overlay box is positioned in the lower-left area, containing text about hierarchy filters and a progress bar. The background shows a table with columns: "TRACT NO.", "SERIAL NUMBER", "HANDSET NUMBER", "IMEI", "TRANSMITTER TYPE", "COMMISSIONED STATUS", and "Actions". The table contains two rows of data. The first row has "S", "156929", "07385025427", "-", "Orbis Red Alert", and a green "Commissioned" button. The second row has "S", "100525", "003197018849636", "867856039361644", "1000", and a green "Commissioned" button. The "Actions" column contains vertical ellipsis icons for each row.

The hierarchy filters are used to determine which lone worker connections are visible in the table below. Your login level will determine whether you are able to select the Contract Area and Offices.

Skip Back Next

TRACT NO.	SERIAL NUMBER	HANDSET NUMBER	IMEI	TRANSMITTER TYPE	COMMISSIONED STATUS	Actions
S	156929	07385025427	-	Orbis Red Alert	Commissioned	⋮
S	100525	003197018849636	867856039361644	1000	Commissioned	⋮

➤ Live Lone Workers

On clicking the live lone worker menu option you will be displayed with a grid showing all lone worker connections you have visibility of with each grid displaying an individual lone worker connection. From this screen you will be able to view such things as the lone worker mobile number and the date and time of the last signal received.

Showing 100 entries per page

Total Records: 48

Above the grid are a number of buttons and filters which allow you to search on specific criteria.

➤ Live Lone Workers

If you wish to view all these lone workers on a single map click the 'View Users on Map' button.



The map will automatically load at a level and location to capture all lone workers within your access level. A lone worker will be represented on the map by a single red pin with the users initial. If the map displays a level whereby a number of lone workers are in the same area then rather than overlay the map with lots of red pins it will display a purple circle with the number of lone workers inside the circle. If you zoom in on this area the red pins will become visible. To view the location of a single lone worker simply click on the relevant lone worker on the right-hand side.

➤ Live Lone Workers

To focus on an individual lone worker you can either click on the 'View User Details and Events' button which is either found on the 'Live Lone Workers' grid or from the 'View User on Map' screen.

View User Details and Events >>

When viewing a single lone worker there are a number of parameter options and filters available. Depending on what you choose will depend on the data displayed. For example you can choose only to show events (Signals) between 2 dates (by default it will automatically show you events for the past 24hrs). To amend these dates simply enter the start date and the end date and press the 'Apply' button.

Date Range



19-04-2020 - 20-04-2020

Apply

Reset

➤ Live Lone Workers

Once you have set your chosen date parameters you are then able to filter the event types. To do this press the 'Filters' option above the events log. From here you will be able to select the types of events you want to display in the events log. If you wish to clear the filter press the 'Clear All Filters'.

Once you are happy with your parameter and filter settings the events log will display the data you have requested. Each event will display the event type, the date and time of the event, the location of the event and depending on the lone worker service type, the battery life. On all events that have a location attached you are able to select the event to display the location on the map.

Filters ▲

<input type="checkbox"/> Device Powered On	<input type="checkbox"/> Position Report
<input type="checkbox"/> Red Alert	<input type="checkbox"/> Red Alert Cancel
<input type="checkbox"/> Amber Alert Start	<input type="checkbox"/> Amber Alert Cancel
<input type="checkbox"/> Amber Cancel Overdue	<input type="checkbox"/> Manual Position
<input type="checkbox"/> Amber Alert Extend	<input type="checkbox"/> Fall
<input type="checkbox"/> Man Down	<input type="checkbox"/> Amber Alert Audio
<input type="checkbox"/> Device Powered Off	<input type="checkbox"/> Status Report
<input type="checkbox"/> Amber Cancel O'Due (OrbisApp)	

🔄 Clear all filters


➤ Live Lone Workers

For Amber and Red Alert event types it is also possible to listen back to the audio generated when dialling the Amber and Red Alert numbers. To do this, under the Amber and Red Alert events there is a 'View Details' link. Pressing this link will open a new screen whereby you can then click the 'Listen to Audio' button. From here you are able to both playback the recording and download the recording. A Red Alert Event will also display a log of the activation.

Red Alert
Andy Birss IOS
25 Mar 2019 13:06

9 A:1 Riverview House Dock Road South, Wirral, CH62 4SQ

TIME	DESCRIPTION	OPR	ACTION
25 Mar 2019 13:15:55	Operator closed (Opr)	SBN	C0
25 Mar 2019 13:15:55	Comment: System Test by Orbis Engineer	SBN	C0
25 Mar 2019 13:14:59	Operator reviewed message (13:07:18 25-03) Duration: 18 Seconds	SBN	C0
25 Mar 2019 13:14:38	Being Handled Red Alert Audio - Site Status Unknown	SBN	C0
25 Mar 2019 13:13:57	Released alarm	BR	C0
25 Mar 2019 13:13:17	Action Started	BR	C0
25 Mar 2019 13:11:58	Outcome : Reverse Channel Command action completed	BR	C0
25 Mar 2019 13:11:58	Action in progress: Action Completed	BR	C0

 Listen to Audio

Close

➤ Manage Portal Users

Only users with higher level access will be able to access this area of Sentry. This area allows you to create new user access to Sentry.

On clicking 'Manage Portal Users' a list of currently setup users will be displayed. In order to add a new user to Sentry click the 'Add New' button.

[+ Add New](#)Show 100 entries

USER NAME	FIRST NAME	SURNAME	EMAIL	TELEPHONE	USER STATUS	ACCOUNT STATUS
bart	Bart	Rostkowski	bart@orbisprotect.com		Active	Active
jackadmin	jack	iivo	jack@iivo.co.uk	09876543210	Active	Active

Previous 1 Next

From here you will be asked to enter some basic details in order to create the account. You will also have the ability to choose what areas of the portal this user will have access to and also if they are able to 'Read' (only view information), 'Write' (edit information), or both. Once you are happy click the 'Save Changes' button at the bottom. If any errors are made these will be highlighted and you will be asked to try again.

➤ Manage Portal Users

Add New Portal User

PLEASE ENTER THE FOLLOWING DETAILS

Username*

Password*



First Name*

Surname*

Email*

Phone

Accessibility Permissions

Permissions Name	Read	Write
Live Lone Workers	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Manage Portal Users	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Manage Lone workers	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
User Activity Summary Report	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Event Detail Summary	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Alarm Activation Report	<input checked="" type="checkbox"/>	<input type="checkbox"/>
User Escalation Detail Summary	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Amber Alert Utilisation	<input checked="" type="checkbox"/>	<input type="checkbox"/>
System Scheduled Reports	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Auto Reporting	<input checked="" type="checkbox"/>	<input type="checkbox"/>
OTA	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Broadcast Message	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Global Escalations	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
User Guides	<input checked="" type="checkbox"/>	<input type="checkbox"/>
User Videos	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Services	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Dashboard maps:

Enabled ☒

If you wish to edit an already setup user simply click on the user from the 'Manage Portal Users' table and make the necessary changes. You will notice the password field is always hidden meaning that a new password will need creating from the 'Change Password' link if it is forgotten.

➤ Manage Lone Worker

The 'Manage Lone Workers' area of the portal allows you to self-manage and edit your lone worker user details. On clicking the link you will be asked to choose the relevant 'Office' in which the lone worker is found that which you wish to edit. Simply select the relevant options from the dropdown areas at the top of the page.

 Allocated Lone Workers

Cost Centre
Please select Cost Centre ▼

Contract Area
Please select Contract Area ▼

Offices
Please select Offices ▼

Once you have selected the relevant 'Office' the list of Lone Worker connections will be visible. From here click on the Lone Worker you wish to edit.

➤ Manage Lone Worker

For Red Alert Application users you are able to view what configuration settings a lone worker has installed along with giving you the ability to amend the configuration.

To do this there are 2 buttons which are only visible once you have selected at least one Red Alert user from the lone worker grid.



Clicking on the Update App Setting button will allow you to send a new profile to the user(s). Simply select the profile you wish to send to the user(s) and click the green Send to Device button at the bottom of the page. You will be informed if the update has been received by the device or not. Where multiple user updates have been requested it will inform you of those where the update has been unsuccessful. New profiles can be created under the OTA Settings menu option which is explained further in this guide.

Selecting the get configuration button will authorise Sentry to request the profile settings of the selected users. A new table will be displayed showing the name of the profile currently installed on the user(s) devices. Where the profile name is 'Logged Off' this means Sentry has been unable to communicate with the device. If you click on the name of the profile then a new screen will be displayed showing more in depth information about the current profile settings

 Update app settings  Get Configuration  HomeSafe

Selecting Home Safe will allow you to both view, edit and create a home Safe geofence. A Home Safe geofence is an area you can create which when the RedAlert Pro Application enters or exits the location then the application will recognise this and will update both the dashboard Home Safe tile and the Home Safe report.

➤ Manage Lone Worker

Manage Lone Worker

Escalation List

User Escalations + Add

Michelle Bre...

Update Priority

Global Escalations

Mohammad Farooq 72367462376

Jaskirat Singh 08826622177

HARRY BRENNAN

Name

STEVE BRENNAN RED ALERT ANDROID

Service Status

Commissioned

Notes

USER IS AN EMPLOYEE OF ORBIS PROTECT
LONE WORKER PRODUCT MANAGER
MALE
60
GINGER HAIR

Save Changes

The 'Manage Lone Workers' area of the portal allows you to self-manage and edit your lone worker user details. On clicking the link you will be asked to choose the relevant 'Office' in which the lone worker is found that which you wish to edit. Simply select the relevant options from the dropdown areas at the top of the page.

From here you are able to edit the name of the lone worker, add any notes, and view/edit any escalation details. Please note you are unable to update either the Lone

Worker device/app number or the device IMEI number. This is because these details are crucial and must be correct in order for the service to communicate with the Orbis ARC. Any changes are made at an individual lone worker level meaning that if an escalation is edited and this escalation is contactable for more than one user then the change will need making on the other lone workerr also.

All changes that are made within Sentry are updated in realtime within the Orbis alarm handling software.

In order for changes to be made you must click the 'Save Changes' button. If you are changing the priority of an escalation then you must click the 'Update Priority' button. On successfully saving a change or changing a priority a successful message will appear.

It is also possible from this screen to view the global escalations that would also be used for the specific lone worker although these are not editable from this screen.

➤ Global Escalation

Global escalations have been added to Sentry so that escalations can be setup and edited much quicker than at an individual lone worker level.

The screenshot displays the Orbis Sentry web application interface. On the left is a dark blue sidebar with a menu including: Dashboard, Administration, Live Lone Workers, Manage Portal Users, Manage Lone Workers, **Global Escalations** (highlighted), OTA Settings, Broadcast Messaging, Storage, Reports, Resources, Elearning, User Guides, User Videos, Availability, and Services. The top right of the header shows the user profile (ORBIS ORBIS DEMO), settings, and a PAGE TOUR button. The main content area features three filter tabs: Cost Centre (ORBIS DEMO), Contract Area (ORBIS DEMO), and Offices (STEVE BRENNAN DEMO DEVICES), followed by an +ADD CONTACT button. Below these is a green header for the contact listing: *GLOBAL ESCALATION CONTACT LISTING FOR STEVE BRENNAN DEMO DEVICES OFFICE. An information icon and text explain that Global Escalation contacts are for groups of lone workers and will be contacted after unsuccessful individual attempts. The main table area is currently empty, with a placeholder card for the 'Customer Support Team' showing edit and delete icons.

➤ Global Escalations

If you wish to add an escalation that would be available for all lone workers within your hierarchy then you are best adding them at the 'Global Escalation' level. The advantage to this is that you only need to add/edit the escalation once in order for the change to be made for all lone workers. Depending on your level of access will depend on what level you can create a global escalation. To create the global escalation first of all select the link account option. From here you will be able to select where you wish to add the escalation. Once you have chosen the link account select the 'Add Contact' button. From here you will be able to add the details of the escalation.

Escalations added at a user level will take priority over escalations added at a Global level.

Add Escalation Contact

① Adding contact here will add it to the group and will be a global escalation contact

Name

Email

Address Line 1*

Address Line 2*

① Drag and drop the contact numbers in position to set the priority of the contact

✕ Phone Number:

✕ Work Number:

✕ Mobile Number:

Save Changes

➤ OTA Settings

As previously discussed in this user guide it is possible to update user profiles for Red Alert Application users.

If you wish to create a new user profile then this is found under the OTA Settings menu option.

From here there are a number of configurable application settings which can be used to create a save as a profile. Once this profile has been created it can then be used in the Update App Settings screen as previously discussed.

Select Settings Available Steve Brennan Android Template OR Create New Profile

Red Alert App

SIP Calling
(Coming Soon)

☐

Off

Trigger SOS
(Not available in iOS devices)

☒

On

Level ⓘ Low

RIP Alarm
(Coming Soon)

☐

Off

Allow Users to Access Settings

☒

Access allowed

Create / Update and Delete Escalations

☐

Restricted

SMS Signalling

☒

On

Fingerprint Lock

☐

Off

Calendar Integration
(Coming Soon)

☐

Off

Min Man Down Timer

Max Man Down Timer

Amber Timer Pre - alerts
(Only applicable to Android App v1.1.0)

Min Amber Timer

Max Amber Timer

GPS Positioning Criteria

(Only applicable to Android App v1.1.0)

GPS Position Update Frequency

Coordinates Refresh Rate
(Only applicable to Android App v1.1.0)

Update

Reset Settings

Delete Settings

OTA Settings

The following are all configurable OTA settings which can be used to create a user profile:

OTA Settings	
Trigger SOS	Turning this option on or off will turn on or off the ability to trigger a Red Alert via the on/off button. You are also able to set the sensitivity of this function from Low to High
Create / Update and Delete Escalations	If enabled then users of the Red Alert Professional application will be able to update and edit their user escalations. If disabled then they will only be able to view them.
Min Man Down Timer	This option allows you to set the minimum length of time a Man Down Timer can be set to
Max Man Down Timer	This option allows you to set the maximum length of time a Man Down Timer can be set to
Min Amber Timer	This option allows you to set the minimum length of time an Amber Timer can be set to
Max Amber Timer	This option allows you to set the maximum length of time an Amber Timer can be set too
GPS Positioning Criteria	This option allows you to choose when GPS locations are communication
GPS Position Update Frequency	This option is only configurable when you have set the GPS Positioning Update Frequency to all signals and timer
Allow Users to Access Settings	This option allows you to enable access to the settings screen within the app. Even if enabled these settings are only visible but not editable by the lone worker
SMS Signalling	This option allows you to turn on SMS communication as a backup in the event the device has no data signal
Fingerprint Lock	This option when enabled only allows the use of the application if a successfully fingerprint scan is recorded
Amber Timer Pre-Alerts	This feature allows you to bespoke at what time period remaining during an Amber Timer will the Red Alert Professional application notify the user their Amber Timer is due to expire.
Co-ordinate refresh rate	This in seconds is the time in which the application will look for a new GPS Location

➤ Broadcast Messaging

The broadcast messaging menu option allows you to create, send and read broadcast messages to Red Alert Application users.

From this screen you can select which user(s) you wish to send a message to before creating and sending the message.

You are also able to view sent messaging and the status against each.

The interface features three tabs: **Select Users** (active), **Select Based on Criteria**, and **Sent Messages**. Below the tabs, a message icon and text prompt the user to select recipients. Three selection criteria are provided: **Cost Centre** (set to ORBIS DEMO), **Contract Area** (placeholder: Please select Contract Area), and **Offices** (placeholder: Please select office). A 'Show 10 entries' dropdown and a 'Search users' input field are located above the user list. The user list table includes checkboxes for selection and columns for Name, Type, and a secondary Type column. The 'Selected Users' panel on the right is currently empty, displaying 'No user(s) selected'. A 'Send Messages' button is positioned at the bottom right of the interface.

Name	Type	Type
<input type="checkbox"/> ANDREA STRONG	Orbis Red Alert	
<input type="checkbox"/> DAVID AINGER RED ALERT APP	Orbis Red Alert	
<input type="checkbox"/> DAVID SMITH	Orbis Red Alert	
<input type="checkbox"/> DIANNE HANEY RED ALERT APP	Orbis Red Alert	
<input type="checkbox"/> ELEANOR OBRIEN RED ALERT APP	Orbis Red Alert	
<input type="checkbox"/> Farooq test	Orbis Red Alert	
<input type="checkbox"/> JACK SINGH	Orbis Red Alert	
<input type="checkbox"/> KHUSHBOO	Orbis Red Alert	
<input type="checkbox"/> LWP SUPPORT TEAM PHONE	Orbis Red Alert	
<input type="checkbox"/> SHAUN WILCOCK RED ALERT APP	Orbis Red Alert	

Showing 1 to 10 of 20 entries

Previous 1 2 Next

Send Messages

➤ Broadcast Messaging

From within in the broadcast message option it is also possible to send messages based on criteria.

To do this select the 'Select Based on Criteria' tab. From here you can choose the relevant criteria option to select users before you send your broadcast message.

The screenshot shows a web interface for selecting users based on criteria. At the top, there are three tabs: 'Select Users', 'Select Based on Criteria' (which is active), and 'Sent Messages'. Below the tabs, a message icon and text state: 'To send a message, please select the user(s):'. The main area contains four criteria selection fields: 'Cost Centre' (with a dropdown menu showing 'ORBIS DEMO'), 'Contract Area' (with a dropdown menu showing 'Please select Contract Area'), 'Offices' (with a dropdown menu showing 'Please select office'), and 'Date Range' (with a date picker showing '18/04/2020 - 18/05/2020'). Below these fields, there are two buttons: 'Select [input] most active users' and 'Select [input] Least active users', both with right-pointing arrows. To the right of these buttons is a large, empty box titled 'Most Active Selected Users'. At the bottom center, there is a 'Send Messages' button.

➤ Storage

The storage area of Sentry is where you are able to store documents private to your organisation.

These documents can be in PDF or Microsoft Office format and once uploaded (by Orbis) can be viewed and downloaded.



The screenshot displays a file storage interface. On the left, a directory tree shows the root directory with subdirectories 'SteveTest', 'OnStaging', and 'ravitest' (which is highlighted). The main area shows a list of files with columns for 'Name', 'Modified', and a menu icon (three dots).

Name	Modified	
 1591352106-file-sample_1MB.doc	12/06/2020 07:52	...
 Alarm_Activation_Report_114310-15918840...	12/06/2020 07:53	...
 Alarm_Activation_Report_120723-15917970...	10/06/2020 13:50	...
 Alarm_Activation_Report_122338-15917970...	10/06/2020 13:50	...
 datadictionary-1591797440.pdf	10/06/2020 13:57	...
 file_example_PPT_250kB-1591884255.ppt	12/06/2020 07:54	...
 testing-1591797337.pdf	10/06/2020 13:56	...
 testing1-1591797363.pdf	10/06/2020 13:56	...

➤ Reports

User Activity Summary Report

This report is used to display when a user has created an event. When a lone worker manually sets up and Amber Alert or triggers a Red Alert then this will be recorded in this report. This report can be useful to determine if a user has been using the lone worker service as they should have been. In order to run the report select the relevant date parameters at the top and press the 'Apply' button.

Event Details Summary Report

This report is used to display all events for an individual. It will also display where possible GPS location information. In order to run the report select the relevant date parameters at the top and press the 'Apply' button.

Alarm Activation Report

This report allows you to view Red Alert activations and what happened during the handling of the event. In order to run the report select the relevant date parameters at the top and press the 'Apply' button.

Home Safe Report

This report is used in conjunction with the RedAlert Pro application Home Safe functionality. This report will display when lone workers are within their Home Safe geofence or not.

Reports

User Escalation Detail Summary

This report will display a list of lone workers and their escalation details.
In order to run the report select the relevant Date parameters at the top and press the 'Apply' button.

Amber Alert Utilisation

This report can be used to monitor how much Amber Alert functionality is used for each Lone Worker.
The report is set out in a calendar style format with data based per day.

System Scheduled Reports

This area of the portal is a repository whereby reports generated by the system can be automatically stored. The types of reports are vast and you should speak with your account manager to discuss.
Bespoke reports can be created if required.

Auto Reporting


Auto reporting is where you can arrange for Sentry reports to be automatically emailed to you on a daily, weekly, bi-weekly or monthly.

App Users Report

This report will list all Red Alert Professional / Welfare users and will include information such as what version of the application is installed and on what model of handset.


➤ Courses

From this area of Sentry you are able to setup lone workers with access to a training course on the lone worker service they use. To do this Click on the Manage Trainees against the relevant course.

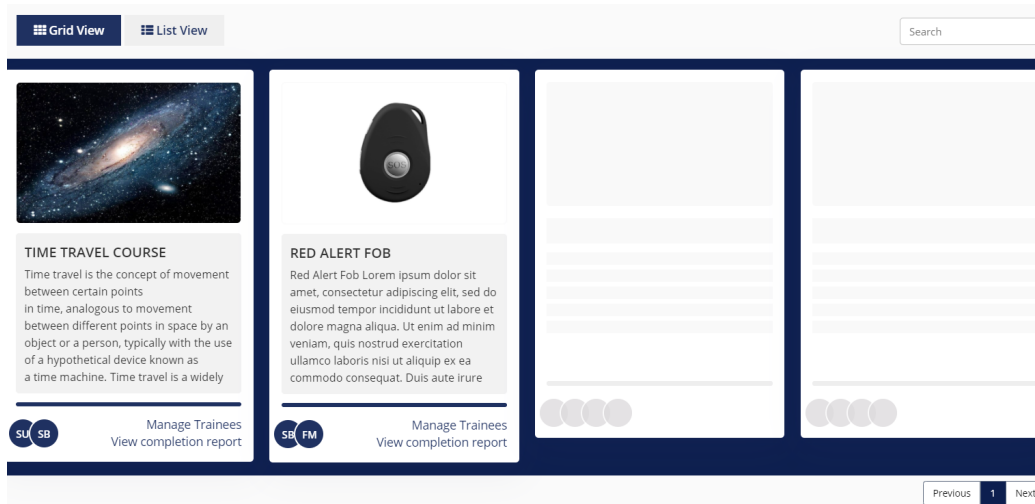

From the Manage Trainees screen you can view a description of the course as well as view who is currently assigned to view this cause.

To add a new trainee simply click on then Assign new trainee button.

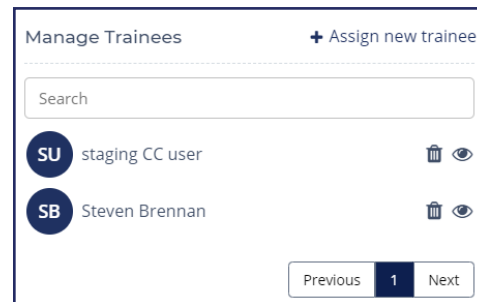

➤ Courses

Next fill in the trainee user form including which hierarchy office this user would come under. This is important as this will allow other managers to view course information for this trainee dependent on their hierarchy access.

At this point the trainee will receive an email containing their username and password to access the course. Trainees should login to the course by opening the following webpage:

<http://elearning.orbisprotect.com/> This webpage can also be accessed by clicking on the Trainee Login menu option within Sentry.

To view a trainee's login details or to delete a trainee then click on the remove or view button against the relevant trainee:

Add new trainee

Cost Centre

Contract Area

Offices

ORBIS DEMO

Please select...

Please select...

First Name *

Last Name *

Email *

Password *

(Must be 8 char with at least 1 Uppercase char, 1 lowercase char, 1 digit, 1 non-alphanumeric character(s) such as %, -, or #)

Confirm Password *

Contact Number

Cancel

Save

It is also possible to view what trainees have completed which courses. To do this select the View Completion Report option against the relevant course. You will then be displayed with a list of trainees and course topics which is exportable to PDF or excel.

EXPORT AS XLS

EXPORT AS PDF

Search

FIRST NAME / SURNAME	EMAIL	INTRODUCTION	DEVICE OVERVIEW	HARDWARE & BUTTONS	CHARGING AND POWERING...	LEDS EXPLAINED	AMBER ALERT FUNCTIONALITY	RED ALERT FUNCTIONALITY	FALL ALERT	QUESTIONS
Farooq Mohd	bindask07@gmail.com	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Steven Brennan	sitexorbissteveb@gmail.com	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Previous

1

Next

➤ Trainee Login



Username *

60c214ddf08c6

Password *

Password

☒ Remember username

LOG IN

[Forgotten your username or password?](#)

The Trainee Login menu option is a simple link to the site trainees should use to login to complete the course. The trainee login screen is a different login screen to the Sentry manager login screen
<http://elearning.orbisprotect.com/>

The username and password created for the trainee should be used to access this site

Resources

There are 3 options available under the resources section of Sentry:

User Guides

On selecting the User guides option you will be able to view and download the details lone worker service user guides.


User Video

On selecting the User Video option you will gain access to the professionally produced Orbis lone worker training videos.

➤ Services

The services menu option will display a breakdown of all service areas for the lone worker service and will inform you if each element is running as it should be.

From this screen you will be able to also view previous days, weeks and months either by scrolling using the previous weeks option or by selecting a specific date from the calendar tool.

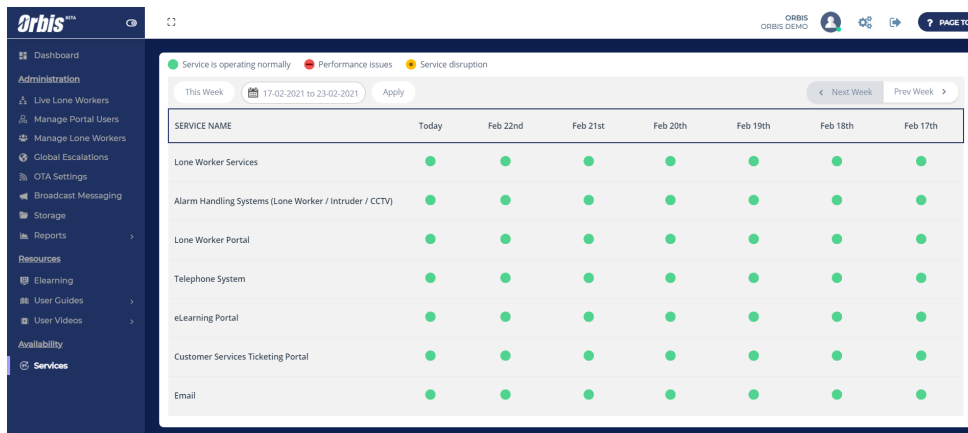

The screenshot shows the Orbis Services dashboard. The left sidebar contains a navigation menu with categories: Administration (Live Lone Workers, Manage Portal Users, Manage Lone Workers, Global Escalations, OTA Settings, Broadcast Messaging, Storage, Reports), Resources (eLearning, User Guides, User Videos), and Availability (Services). The main content area displays a table of service status for the week of February 17th to 23rd, 2021. The table has columns for SERVICE NAME, Today, Feb 22nd, Feb 21st, Feb 20th, Feb 19th, Feb 18th, and Feb 17th. The services listed are Lone Worker Services, Alarm Handling Systems (Lone Worker / Intruder / CCTV), Lone Worker Portal, Telephone System, eLearning Portal, Customer Services Ticketing Portal, and Email. All services show a green dot, indicating they are operating normally.

SERVICE NAME	Today	Feb 22nd	Feb 21st	Feb 20th	Feb 19th	Feb 18th	Feb 17th
Lone Worker Services	●	●	●	●	●	●	●
Alarm Handling Systems (Lone Worker / Intruder / CCTV)	●	●	●	●	●	●	●
Lone Worker Portal	●	●	●	●	●	●	●
Telephone System	●	●	●	●	●	●	●
eLearning Portal	●	●	●	●	●	●	●
Customer Services Ticketing Portal	●	●	●	●	●	●	●
Email	●	●	●	●	●	●	●

If there has been a performance issue or service disruption then there will be a description explaining what it was and also the time taken to resolve it.

➤ Contact Information



Address:

Orbis Protect
Riverview House
Dock Road South
Wirral
CH62 4SQ

Email: lwpsupport@orbisprotect.com

Tel: 0845 345 7800 (option 5)



*Our wholly owned Alarm Receiving Centre operates
to BS5979 Cat II and BS8484 standards 24/7/365*